

AG HR LF Series

high rejection low fouling brackish water RO element

The A-Series family of proprietary thin-film reverse osmosis membrane are characterized by high flux and high sodium chloride rejection. AG HR LF Brackish Water Elements are selected for the treatment of impaired water when high rejection is desired. The AG HR LF membrane features a more neutral charge and therefore reduces interactions with potential foulants present in surface water or tertiary effluent.

Table 1: Element Specification

Membrane	A-Series, Thin-film membrane (TFM*)
-----------------	-------------------------------------

Model	Average permeate flow gpd (m ³ /day) (1)(2)	Average NaCl rejection (1)(2)	Minimum NaCl rejection (1)(2)
AG-90 LF	2300 (8.7)	99.8%	99.3%
AG-400 LF, 34	10500 (39.7)	99.8%	99.3%

(1) Average salt rejection after 24 hours of operation. Individual flow rate may vary +25%/-20%.

(2) Testing conditions: 2,000ppm NaCl solution at 225psi (1,550kPa) operating pressure, 77°F (25°C), pH7 and 15% recovery.

Model	Active area ft ² (m ²)	Outer wrap	Part number
AG-90 LF	90 (8.4)	Fiberglass	3056674
AG-400 LF, 34	400 (37.2)	Fiberglass	3056675

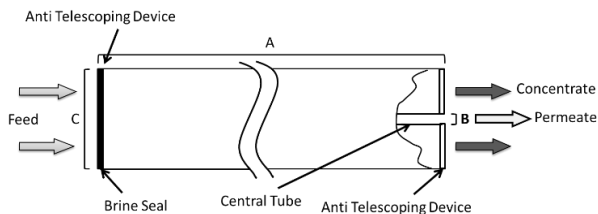


Figure 1a: Element Dimensions Diagram – Female

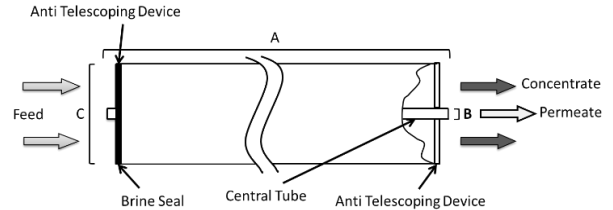


Figure 1b: Element Dimensions Diagram – Male

Table 2: Operating and CIP parameters

Typical Operating Pressure	200 psi (1,380 kPa)
Typical Operating Flux	10-20GFD (15-35LMH)
Maximum Operating Pressure	600 psi (4,137 kPa)
Maximum Temperature	Continuous operation: 122°F (50°C) Clean-In-Place (CIP): 122°F (50°C)
pH range	Optimum rejection: 7.0-7.5, Continuous operation 2.0-11.0, Clean-In-Place (CIP): 1.0-13.0 (1)
Maximum Pressure Drop	Over an element: 12 psi (83 kPa) Per housing: 50 psi (345 kPa)
Chlorine Tolerance	1,000+ ppm-hours, dechlorination recommended
Feedwater	NTU < 1 SDI ₁₅ < 5

(1) Please refer to Cleaning Guidelines Technical Bulletin TB1194.

Table 3: Dimensions and Weights

Model	Type	Dimensions, inches (cm)			Boxed Weight lbs (kg)
		A	B	C	
AG-90 LF	Male	40.0 (101.6)	0.75 (1.90)	3.9 (9.9)	9 (4)
AG-400 LF, 34	Female	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	35 (16)

Find a contact near you by visiting www.suezwatertechnologies.com and clicking on "Contact Us."

*Trademark of SUEZ; may be registered in one or more countries.

©2018 SUEZ. All rights reserved.

Distributed By:

