

Hytrex*

melt blown depth filter for high purity water systems



features and benefits

- Well-suited for high purity applications with fast rinse-ups due to superior construction
- Automated packaging and manufacturing processes ensure a clean, reliable product every time
- Meets stringent requirements for most critical processes
- Pure polypropylene construction
- Wide chemical compatibility
- Combines efficiency, long, life, and purity

applications

- High purity chemicals
- Potable water filtration
- Food and beverage
- Reverse osmosis prefiltration
- Electronics

specifications

Table 1: Specifications and performance information

Ratings	1, 3, 5, 10, 20, 30, 50, 75, 100 microns (nominal)	
Inner Diameter (nominal)	1 in (2.5 cm)	
Outer Diameter	2.5 in (6.4 cm)	
Lengths	4 7/8 in (12.4 cm)	29 1/4 in (74.3 cm)
	9 3/4 in (24.8 cm)	30 in (76.2 cm)
	10 in (25.4 cm)	40 in (101.6 cm)
	19 1/2 in (49.5 cm)	50 in (152.4 cm)
	20 in (50.8 cm)	

Longer lengths up to 70 in may be available upon request

Materials of Construction

Filter Media	Polypropylene
Adapters	Polypropylene
Elastomer	Buna, EPDM, Silicone, Viton ¹ , Santoprene ² (flat gasket only)

Performance Conditions

Maximum pressure drop:	35 psid (2.4 bar) @ 77°F (25°C)
Recommended change-out pressure drop:	20 psid (1.4 bar) @ 77°F (25°C)

efficiency information


Table 2: Removal efficiency based on a modified ASTM 795 test procedure

Micron Rating	Removal rating (µm) at various efficiencies		
	90.0%	99.0%	99.9%
1 µm			
3 µm	<i>Efficiency of nominal filters varies by application. See note for information on nominal filter efficiency³</i>		
5 µm			
10 µm			
20+ µm			

Find a contact near you by visiting www.suezwatertechnologies.com and clicking on "Contact Us."

*Trademark of SUEZ; may be registered in one or more countries.

©2019 SUEZ. All rights reserved.

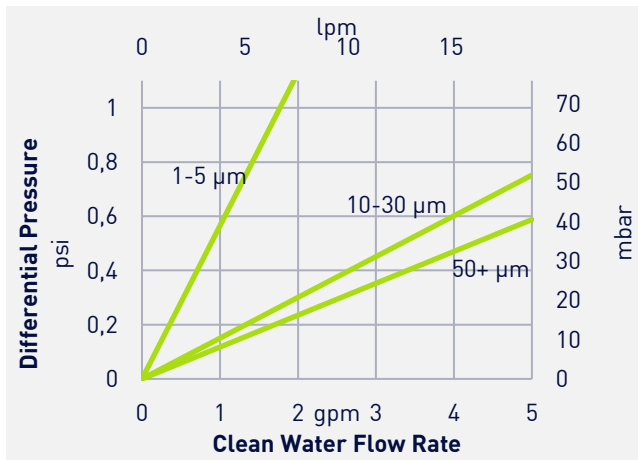

Graph 1: Hytrex clean water flow rate based on a 10 in length filter

quality

Hytrex filters are manufactured under a quality management system that has been certified to meet ISO 9001 standards. Each filter is assigned a lot code to ensure traceability of the data and materials used in the manufacturing process.

certifications

- U.S. FDA 21CFR 177.1520 food contact requirements
- Article 3 of the EU Framework Regulation No. 1935/2004/EC safety requirements
- EU Plastics Regulation No. 10/2011 (may be used as intended in all compliant EU Member states)
- USP class VI-121°C Plastics criteria
- NSF 42 and 61 criteria
- ISO 9001 criteria

SUEZ filter cartridges are designed and manufactured for resistance to a wide range of chemical solutions. Conditions will vary with each application and users should carefully verify chemical compatibility. Please contact your SUEZ representative for more information.

ordering information

Replace the numbers with your desired values from each column. Columns 3, 4, and 5 are optional depending on the desired configuration. Use "-B" if you would like bulk packaging.

Example: GX 05-29 1/4-YYP




Table 3: Ordering information

	1	2	3	4	5
Type	Micron Rating (nominal)	Cartridge Length	End #1 Adapter	End #2 Adapter	Elastomer Material
GX	01 = 1 µm	4 7/8 in (12.4 cm)	E = 222 O-Ring	H = Fin	B = Buna E = EPDM P = Santoprene ² (flat gasket only) S = Silicone V = Viton ¹
	03 = 3 µm	9 3/4 in (24.8 cm)	F = 226 O-Ring	K = Self Seal Spring	
	05 = 5 µm	10 in (25.4 cm)	L = Extended Core	S = Solid End	
	10 = 10 µm	19 1/2 in (49.5 cm)	X = Standard Plain End (no gasket)	X = Standard Plain End (no gasket)	
	20 = 20 µm	20 in (50.8 cm)	Y = Flat Gasket	Y = Flat Gasket	
	30 = 30 µm	29 1/4 in (74.3 cm)			
	50 = 50 µm	30 in (76.2 cm)			
	75 = 75 µm	40 in (101.6 cm)			
	100 = 100 µm	50 in (152.4 cm)			
		<i>Longer lengths up to 70 in may be available upon request</i>			

¹Viton is a registered mark of DuPont

²Santoprene is licensed to Advanced Elastomer Systems, L.P.

³Absolute-rated filters have been designed and tested to reject at least 99% of particles of the listed micron size. Nominal-rated filters have a wider distribution of pore sizes and therefore a wider distribution of rejected particle sizes. The nominal rating is primarily used to compare efficiencies across a filter family and between filter manufacturers. Efficiency is dependent on particle shape, size, composition, application, and testing protocol.



Distributed By:

